




GOUPIL

Goupil G4 M - Tipper N1 homologation



DIMENSIONS

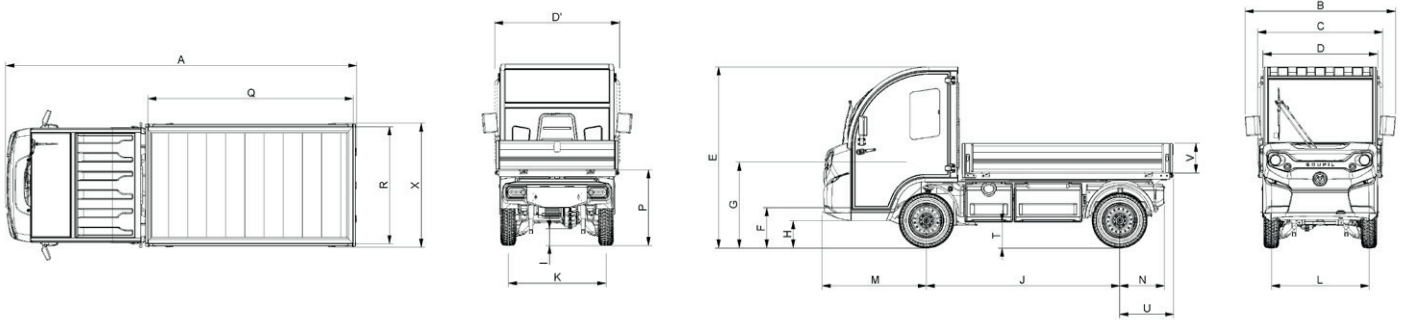

| DIMENSIONS | A | B | C | D* | D* | E | F | G | H | I | J | K | L | M | N | P | Q | R | T | U | V | X |
|------------|-------|-------|-------|-------|-------|-------|-----|-----|-----|-----|-------|-------|-------|-------|-----|-----|-------|-------|-----|-----|-----|-------|
| mm | 3,675 | 1,574 | 1,305 | 1,200 | 1,305 | 1,893 | 423 | 897 | 288 | 175 | 2,022 | 1,045 | 1,045 | 1,089 | 468 | 788 | 2,147 | 1,222 | 282 | 564 | 308 | 1,298 |

TECHNICAL OVERVIEW

CHASSIS | CAB

| | |
|--|----------|
| Homologation | N1 |
| Maximum speed | 50 km/h |
| External turning radius (kerb to kerb) | 3,900 mm |

G4 TIPPER

| Battery type | Lead acid, 2 V traction cells | | | Lithium LiFePo4 | | |
|---|-------------------------------|-------------|-------------|-----------------|-------------|-------------|
| | 8.6 kWh | 11.5 kWh | 15.4 kWh | 9 kWh | 14 kWh | 21 kWh |
| Battery capacity | 8.6 kWh | 11.5 kWh | 15.4 kWh | 9 kWh | 14 kWh | 21 kWh |
| Charging time on household socket | 8h30 @ 7 A | 8h30 @ 10 A | 9h45 @ 10 A | 4h15 @ 13 A | 6h30 @ 13 A | 9h00 @ 13 A |
| Maximum permissible mass | 2,100 kg | 2,100 kg | 2,100 kg | 2,100 kg | 2,100 kg | 2,100 kg |
| Mass in running order | 1,110 kg | 1,203 kg | 1,277 kg | 892 kg | 924 kg | 949 kg |
| Payload capacity (passenger weight included 75 kg) | 915 kg | 822 kg | 748 kg | 1,133 kg | 1,101 kg | 1,076 kg |
| Tow load capacity for road approved trailers (without brakes) | 555 kg | 601 kg | 638 kg | 446 kg | 462 kg | 474 kg |
| Tow load capacity for road approved trailers (with brakes) | 1,400 kg | 1,400 kg | 1,400 kg | 1,400 kg | 1,400 kg | 1,400 kg |

G4 TIPPER DIMENSIONS

| | |
|-------------------------|------------|
| Length | 2,147 mm |
| Width | 1,222 mm |
| Height | 308 mm |
| Weight of the equipment | 127 kg |
| Loading area | 2.6 m² |
| Maximum tipping angle | 47 ° |
| Load bed lifting time | 12 seconds |

CAGE BODY DIMENSIONS (OPTIONAL)

| Cage body type | Mesh standard cage body | Solid standard cage body | Mesh half-height cage body |
|--|-------------------------|--------------------------|----------------------------|
| Cage body weight | 41 kg | 40 kg | 31 kg |
| Height with cage body | 1,108 mm | 1,108 mm | 708 mm |
| Useful volume with cage body | 2.9 m³ | 2.9 m³ | 1.85 m³ |
| Max height load bed raised with cage body | 3,089 mm | 3,089 mm | 3,089 mm |
| Max height load bed raised without cage body | 2,545 mm | 2,545 mm | 2,545 mm |

STANDARD

- Reinforced aluminium load bed
- Aluminium dropdown and detachable side and rear gates
- Cab mounted tipper controller on wander lead
- Hydraulic cylinder including safety valve and stand (compliant with 3.5t standards)
- Hydraulic cylinder lifting capacity limited to 1,000 kg with spreading load

OPTIONS & ACCESSORIES

- Mesh or solid standard cage body
- Mesh half-height mesh cage body
- Canvas on cage body
- Net on cage body
- 4 tiedown rings
- Watering system with 500 L tank
- High-pressure washer with 500 L tank

D: N1 approval. D: L7e-CU approval. Any information or other data provided in this document is non-binding and subject to modification at any time. March 2022.



Goupil | 2445 Avenue de la Vallée du Lot 47320 Bourran - France | +33 (0)5 53 79 39 39 | SAS au capital de 4 000 000 € | RC AGEN B 421 204 041 | Siret : 421 204 041 00063